




LED NEON TUBE LIGHT, RGB, 24V, IP20,  
SUSPENDABLE (1.5M LENGTH)

| SKU: NTUBE/RGB15



ULTRA LEDs

-  [ultraleds.co.uk](https://ultraleds.co.uk)
-  0800 088 3300
-  [orders@ultraleds.co.uk](mailto:orders@ultraleds.co.uk)

FEATURES & BENEFITS

- Introducing our 1.5 Metre long RGB Neon Tube. Perfect for creating a stunning ambient light display with a controllable full colour spectrum and 350° illumination
- High quality, high brightness
- Suitable for wall mounting with brackets or suspending from ceiling
- Controllable when paired with RGB controller
- Stunning 360° light displays using 180 LED strip
- Lightweight design



IP20

R

G

B

24V

80  
CRI

CE  
EMC

CE  
LVD


 RoHs

 3YR  
Guarantee

TECHNICAL INFORMATION

Neon Specifications

SKU Code	NTUBE/RGB15
Voltage	24V
Watts	31.5W
Lumens	Red: 180LM Green: 315LM Blue: 90LM
Lumens p/W	35LM
LED Chip Type	SMD 5050
Beam Angle	360°
Diameter	25mm
Tube Length	1500mm
CRI	80
IP Rating	IP20
Cable Length	1000mm
Operating Temp	-40°C to +40°C
Lifespan	Up to 25000 Hours
Certification	CE-EMC, CE-LVD, RoHs
Guarantee	3 Years

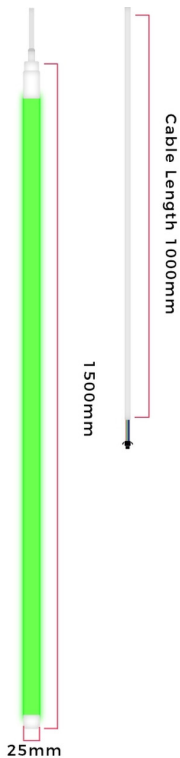


## DESCRIPTION

Introducing our 1.5 Metre long RGB Neon Tube. Perfect for creating a stunning ambient light display with a controllable full colour spectrum and 350° illumination. these tubes are controllable when used with an RGB controller, which helps to create a full colour spectrum. They are also DMX controllable, [click here to view our DMX Controller range](#).

These tubes are designed to either be suspended from the ceiling by their 1 metre pre attached cable or wall mounted with the use of mounting brackets.

Neon flex can be used in some instances to replicate traditional neon where fragile glass isn't suitable. Neon Flex looks better than glass neon - and it opens all the environments where fragile Glass Neon cannot be used.

**Please note:** A narrow dark spine will be visible along the back of these light tubes when illuminated, this is detailed in the imagery. This RGB Neon Tube will require a controller in order to allow full colour functionality. Browse our range of RGB LED controllers [here](#).

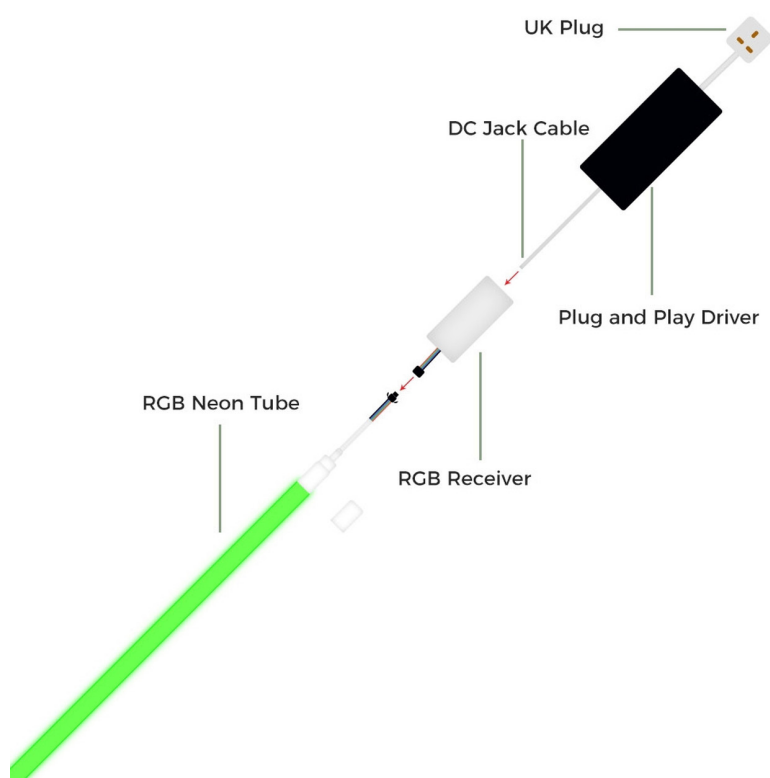

DIAGRAM