


12V EASY TO USE ECO BRIGHT LED TAPE, VERY WARM WHITE 2700K, 60 LEDS P/M, IP20 (5M REEL)

| SKU: UL2835VW60



ULTRA LEDs

 ultraleds.co.uk

 0800 088 3300

 orders@ultraleds.co.uk



FEATURES & BENEFITS

- Versatile tape ideal for both domestic and commercial installations
- Energy efficient
- High brightness with the 2835 LED Chip
- Comes with a 500mm Easy to Use Syndeo connector
- Need a custom length?
We can cut our tapes to your exact specification

IP20

2700
K

12V

CE
EMC

CE
LVD

RoHs

3YR
Guarantee

TECHNICAL INFORMATION

Tape Specifications

SKU Code	UL2835VW60
Voltage	12V
Watts p/M	4.8W p/M
No. of LEDs p/M	60 LEDs
Current	0.4A p/M 2A p/5M
Colour	Very Warm White
Colour Temperature	2700K
IP Rating	IP20
Lumens p/M	480LM
Lumens p/W	100LM
LED Chip Type	2835
LED Chip Size	2.8mm x 3.5mm
Beam Angle	120°
CRI	>80
PCB Width	8mm
PCB Thickness	1.2mm
Cut Points	Every 5cm
Operating Temp	-20°C to +60°C
Average Lifespan	Upto 25000 Hours
Certification	CE-EMC CE-LVD RoHs
Guarantee	3 Years

Driver Requirements

1 Metre	> 6W
2 Metres	> 11W
3 Metres	> 16W
4 Metres	> 22W
5 Metres	> 27W

DESCRIPTION

This robust tape can be cut to any desired length at any of the allocated cut points, and can be extended if required. The tail on each end ensures you can use two runs of our tape with the compatible Syndeo multiport driver, minimising waste. If there is a requirement for the strip tape to be cut into several sections we also offer additional plug & play snap connectors to accompany this.

Maximum runs of up to 5 metres can be achieved with this tape before visible voltage drops occur.

Eco Bright LED Strips use a more efficient 2835 chip, producing more lumens per watt than old style legacy strip lights currently offered in the mass market today.


12V strip tape works from a 240v mains circuit when being powered by a compatible transformer. Alternatively, the strip units can be wired to a dedicated 12V DC circuit without the need for a transformer. To guarantee the highest efficiency, we advise that you change your existing transformers to LED Drivers guaranteeing compatibility. Please see our quick driver guide below:

What Driver do I need?

We have many easy to use compatible drivers available in various wattages. To work out what driver you will need for each length of LED you can simply multiply the wattage of the tape by the length of LED strip you will be using, this will give you the total wattage the LED strip requires, then simply choose a driver which is at least 10% above this figure.

For this tape range you will require a driver which is above the below figures.

1 metre - More than 6w	2 metre - More than 11w
3 metre - More than 16w	4 metre - More than 22w
5 metre - More than 27w	

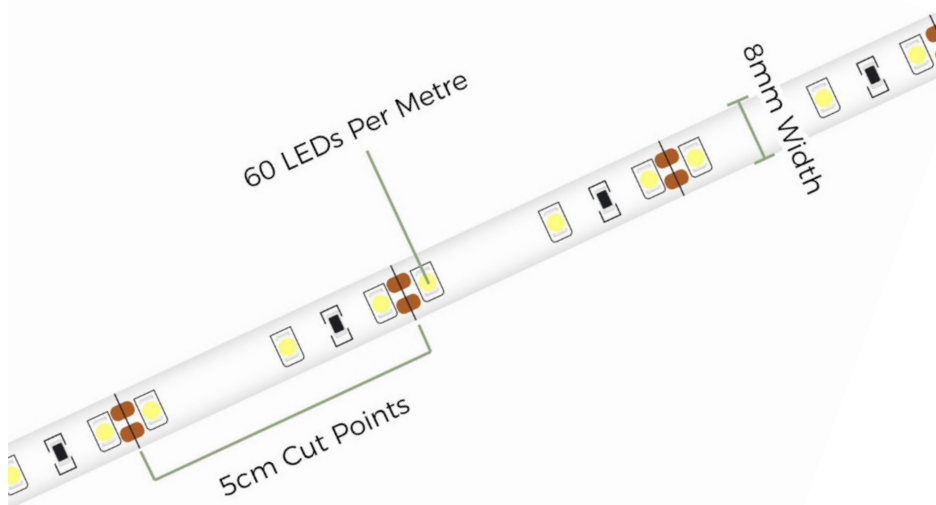

TAPE DIAGRAM