

12V EASY TO USE ECO BRIGHT LED TAPE, WARM WHITE 3000K, 60 LEDS P/M, IP65 (5M REEL)

| SKU: UL2835WW60IP




ULTRA LEDs

ultraleds.co.uk

0800 088 3300

orders@ultraleds.co.uk

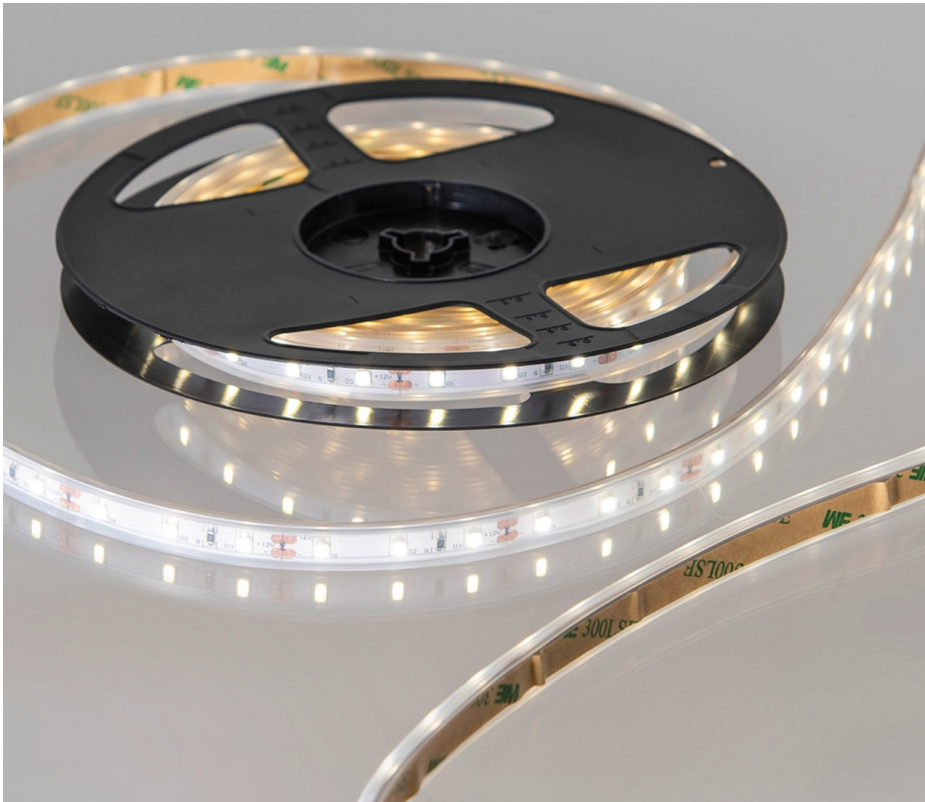

FEATURES & BENEFITS

- Versatile tape ideal for both domestic and commercial installations
- Energy efficient
- High brightness with the 2835 LED Chip
- Comes with a 500mm Easy to Use Syndeo connector
- Need a custom length?
We can cut our tapes to your exact specification

IP65

3000
K

12V

CE
EMC

CE
LVD

RoHs

3YR
Guarantee

TECHNICAL INFORMATION

Tape Specifications

| | |
|--------------------|----------------------|
| SKU Code | UL2835WW60IP |
| Voltage | 12V |
| Watts p/M | 4.8W p/M |
| No. of LEDs p/M | 60 LEDs |
| Current | 0.4A p/M 2A p/5M |
| Colour | Warm White |
| Colour Temperature | 3000K |
| IP Rating | IP65 |
| Lumens p/M | 460LM |
| Lumens p/W | 95LM |
| LED Chip Type | 2835 |
| LED Chip Size | 2.8mm x 3.5mm |
| Beam Angle | 120° |
| CRI | >80 |
| PCB Width | 8mm + 2mm Silicone |
| PCB Thickness | 1.2mm + 2mm Silicone |
| Cut Points | Every 5cm |
| Operating Temp | -20°C to +60°C |
| Average Lifespan | Upto 25000 Hours |
| Certification | CE-EMC CE-LVD RoHs |
| Guarantee | 3 Years |

Driver Requirements

| | |
|----------|-------|
| 1 Metre | > 6W |
| 2 Metres | > 11W |
| 3 Metres | > 16W |
| 4 Metres | > 22W |
| 5 Metres | > 27W |

DESCRIPTION

The IP rated Easy to Use 5 metre reels of LED Strip tapes come with a pre-attached Easy to Use Syndeo Connection at each end and self-adhesive backing which makes installation quick and hassle free. There is no complicated wiring involved, simply plug in to the compatible Syndeo driver and go.

Maximum runs of up to 5 metres can be achieved with this tape before visible voltage drops occur.

Please note: A silicone end cap must be glued on to reseal the end once the tape is cut to maintain its IP rating. End cap kits sold separately.

Eco Bright LED Strips use a more efficient 2835 chip, producing more lumens per watt than old style legacy strip lights currently offered in the mass market today.


12V strip tape works from a 240v mains circuit when being powered by a compatible transformer. Alternatively, the strip units can be wired to a dedicated 12V DC circuit without the need for a transformer. To guarantee the highest efficiency, we advise that you change your existing transformers to LED Drivers guaranteeing compatibility. Please see our quick driver guide below:

What Driver do I need?

We have many easy to use compatible drivers available in various wattages. To work out what driver you will need for each length of LED you can simply multiply the wattage of the tape by the length of LED strip you will be using, this will give you the total wattage the LED strip requires, then simply choose a driver which is at least 10% above this figure.

For this tape range you will require a driver which is above the below figures.

| | |
|-------------------------|-------------------------|
| 1 metre - More than 6w | 2 metre - More than 11w |
| 3 metre - More than 16w | 4 metre - More than 22w |
| 5 metre - More than 27w | |

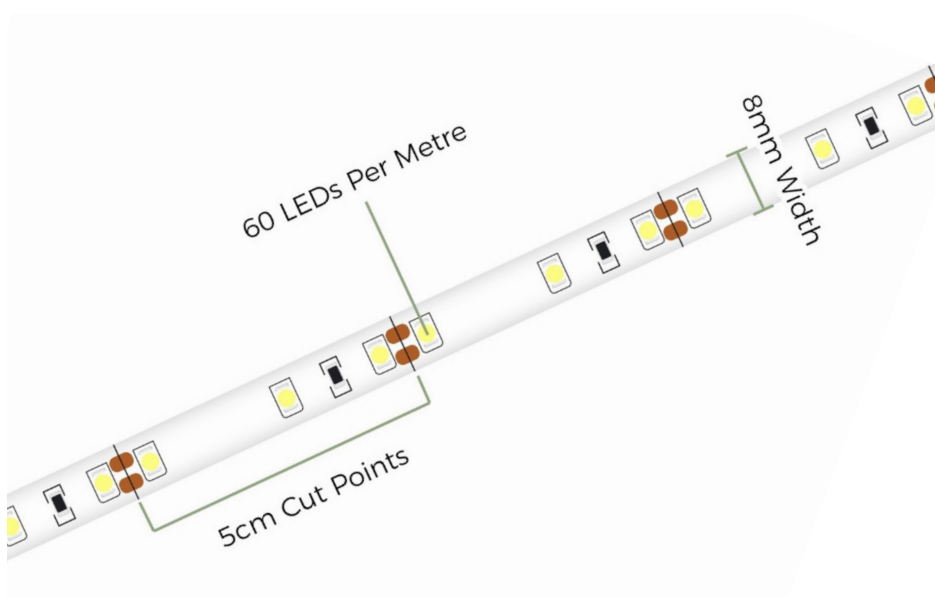

TAPE DIAGRAM