NTUBE/RGB/WEC-0.5M-V2

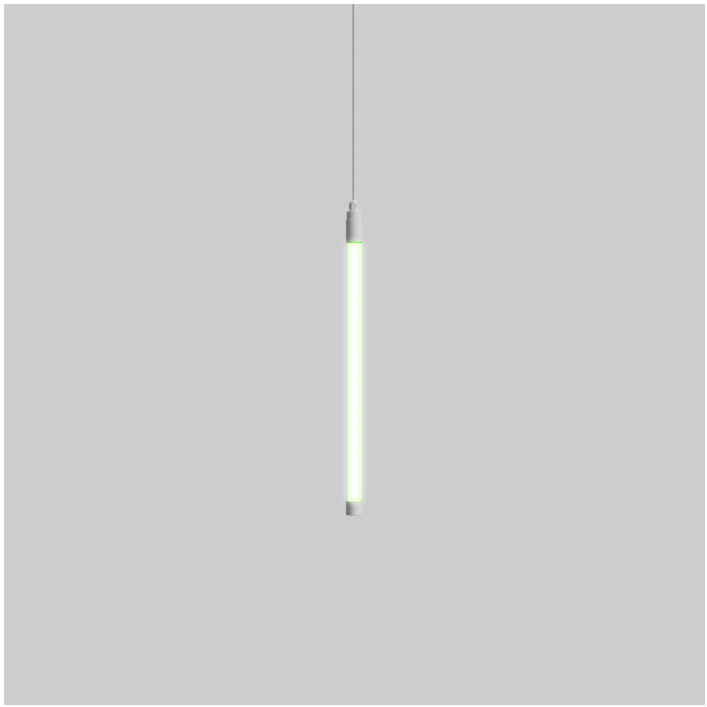

Key Features

Mounting Type: Suspended, Surface Mounted

Beam Angle: 350°

350° BEAM | IP20 | 3 YEAR

Mechanical Data

Body Colour	White

Input

Input Voltage	24 - 24

Photometric Data

Beam Angle	350°
Colour Type	RGB
Lumens Per Watt	47Lm/W

Environment

Ingress Protection (IP)	IP20

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions

Mounting Type	Suspended, Surface Mounted

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions