Free Bending, Up and Down andSide Bending Flexible Recessed Plaster in LED Aluminium Channelin 2M

6114FLEX-2M

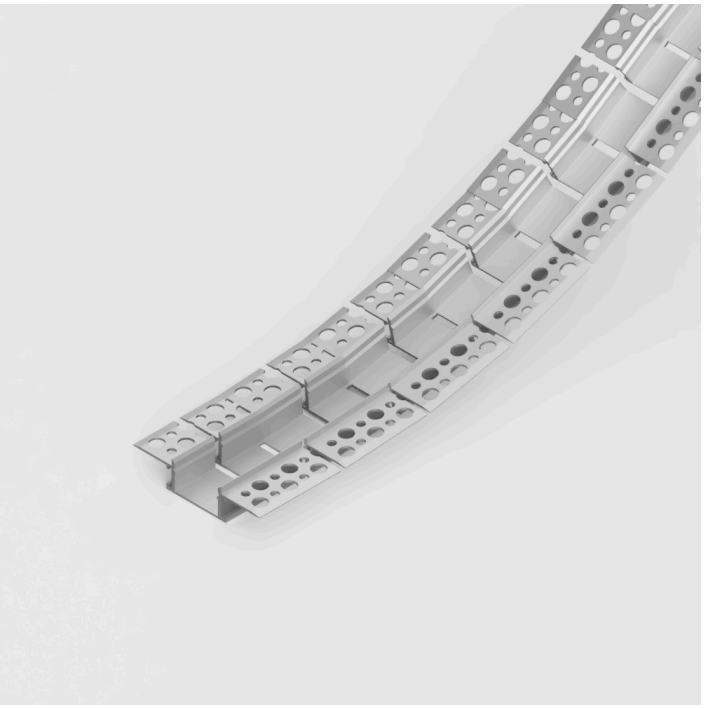

Key Features

Dimensions (mm): 61mm x 14mm x 2000mm

Diffuser Colour: No Diffuser

5 YEAR

IP20

Mechanical Data

Bend Direction	LEFT & RIGHT OR UP & DOWN
Body Colour	Silver
Diffuser Included	Yes
Illuminated Surface Width	24mm
Max · LED Strip Light Width	20mm
Min · Bend Radius	150mm
Min · Pitch for Diffusion	120
No · of Rows for Non-Spotting	1
Product Weight	753g

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions

Photometric Data	
Beam Angle	105°
Diffuser Colour	No Diffuser
Diffuser Finish	SILICONE

Environment	
Application Environment	INDOOR
Body Material	Aluminium
Ingress Protection (IP)	IP20
Mounting Type	Plaster In, Recessed

Packaging & Shipping	
Items / Sets Per Pack	1

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions