Free Bending, Up and Down andSide Bending Flexible Recessed Plaster in LED Aluminium Channelin 3M

**6114FLEX-3M**

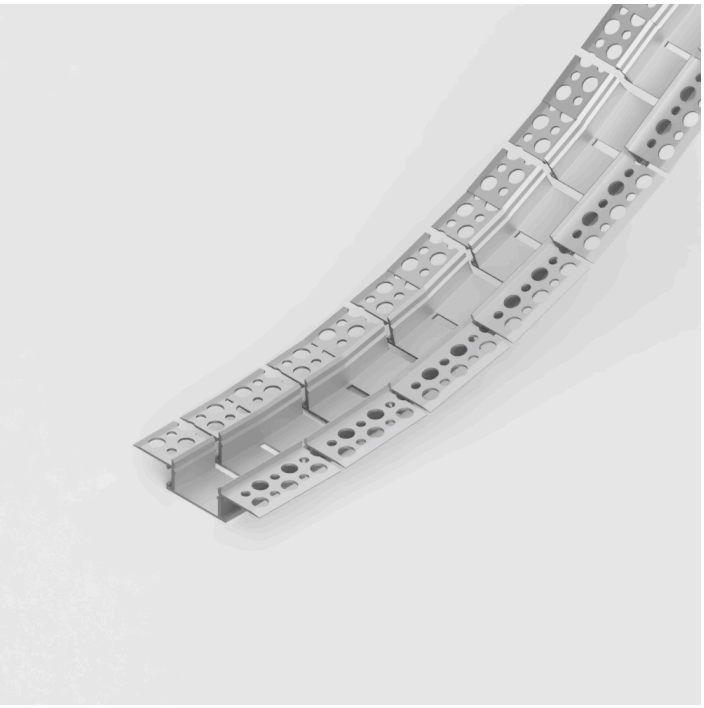

**Key Features**

**Dimensions (mm):** 61mm x 14mm x 3000mm

**Diffuser Colour:** No Diffuser

5 YEAR

**Mechanical Data**

| | |
|---|---|
| Bend Direction | LEFT & RIGHT OR UP & DOWN |
| Body Colour | Silver |
| Diffuser Included | yes |
| Illuminated Surface Width | 24mm |
| Max · LED Strip Light Width | 20mm |
| Min · Bend Radius | 150mm |
| Min · Pitch for Diffusion | 120 |
| No · of Rows for Non-Spotting | 1 |
| Product Weight | 1097g |



Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions

| Photometric Data | |
|---|---|
| Beam Angle | 105° |
| Diffuser Colour | No Diffuser |
| Diffuser Finish | SILICONE |

| Environment | |
|---|---|
| Application Environment | INDOOR |
| Body Material | Aluminium |
| Ingress Protection (IP) | IP20 |
| Mounting Type | Plaster In, Recessed |

| Packaging & Shipping | |
|---|---|
| Items / Sets Per Pack | 1 |



Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions