
NEONTOPMICRO410/5MKIT-BLUE

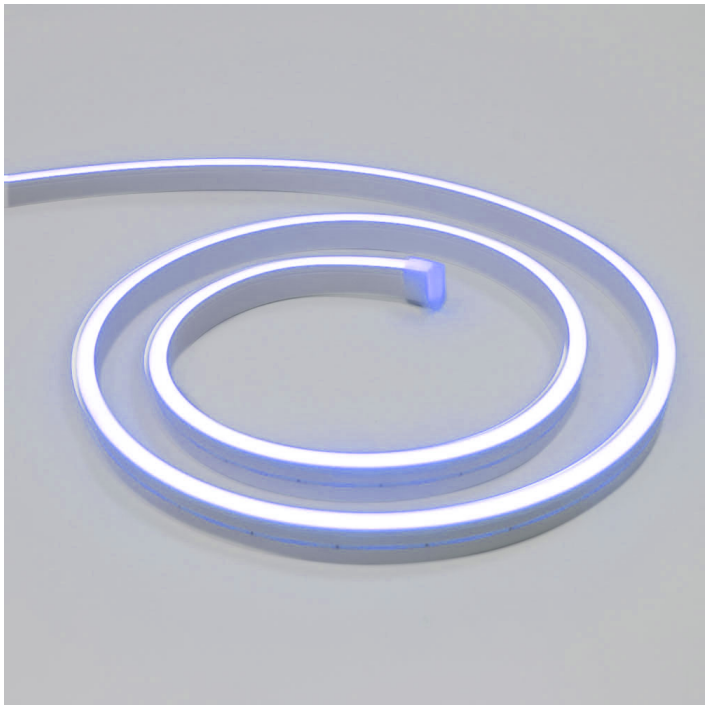

Key Features

Horizontal Bend- 5 Metre Kit- 7.9 Watts p/m- Flat- IP65- 12V- 30mm Max. Bend Radius- Dimmable

12V DC Input Voltage | 5m Max. Run Length | 7.9W Max. Wattage Per Metre | 120° Beam Angle | >90 CRI | 3 SDCM | 17mm Cut Points | IK06 | IP65

Mechanical Data

Body Colour	White
Bend Direction	Horizontal
Cable Both Ends	No
Cable Length	500 mm
Cut Points	17
Entry Cable Direction	Rear
LEDs Per Metre	168
LEDs Total	840
Product Weight	289 g

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions

Input	
Input Current Type	DC

Electrical Data	
Max · Run Length	5 m
Wattage Max · @1 Metre	7.9 W
Wattage Typ · @1 Metre	7.2 W
Wattage Typ · @5 Metre	36 W
Wattage Typ · @Max Run Length	36 W

Photometric Data	
Beam Angle	120 °
Colour Type	Single Colour
CRI	90
Light Colour	Blue
Lumens Per Watt	38 Lm/W
SDCM	3

Environment	
Body Material	Silicone
Impact Protection (IK)	6
Ingress Protection (IP)	65

Packaging & Shipping	
Battery Included	No
Glue Included	No
Volume	1680000 ml

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions