


STRIPE U-SHAPED HIGH DENSITY PU WALL COVING PUROTOUCH®

| SKU: TAGC361-2M

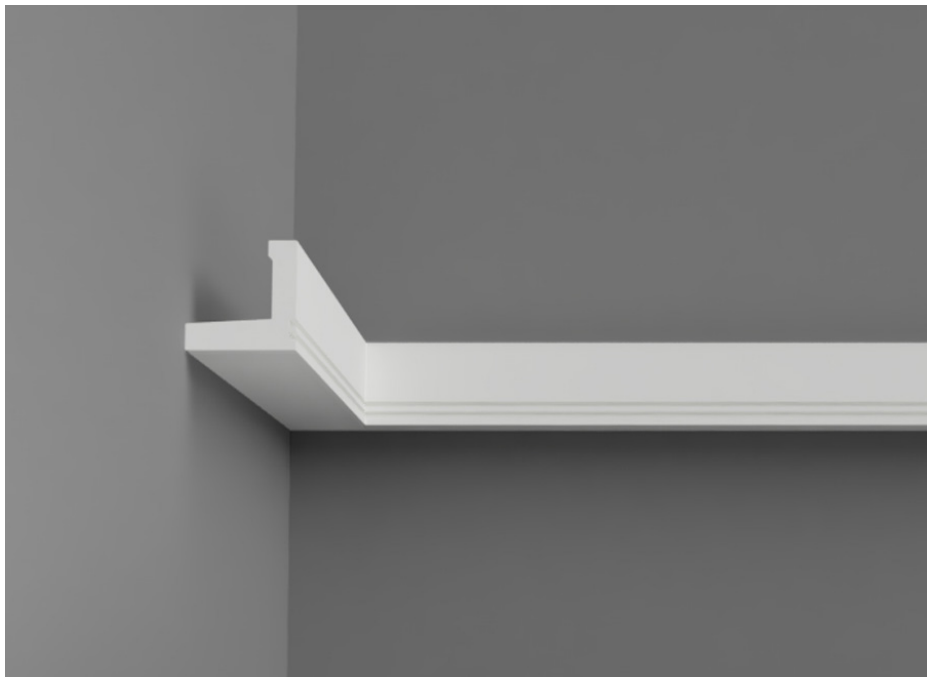


TECHNICAL INFORMATION

Technical Info


Composition	PU - Polyurethane
Hardness	> 30 shore D
Density	± 215 kg/m ³
Thickness	8mm > 30mm
Fire Standard	E
Environment	CFC free
Toxic	Free of asbestos, cyanides and formaldehyde
Water Absorption	< 0.1%
Heat Conductivity	$\lambda = 0.029 \text{ W/mK}$

Dimensions

LED Profile (CHAN-178)

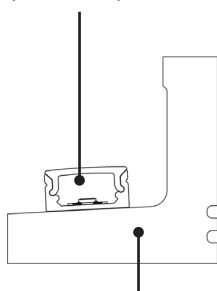

Polyurethane Coving

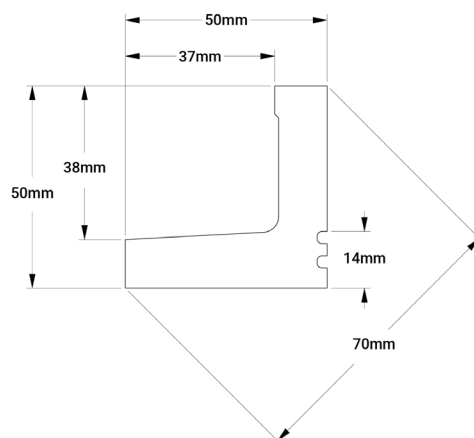

ULTRA LEDs



ultraleds.co.uk



0800 088 3300


















orders@ultraleds.co.uk

FEATURES & BENEFITS

- A highly defined sculpting process results in high definition shaping and detailing
- Pre primed and ready for painting
- Easy to finish with high quality paints
- Easy to cut, sand and mitre to requirements
- Suitable for outdoor use when treated correctly
- Abrasion resistance, great for installations at floor level
- Resistant to common solvents and light moisture as standard
- High Heat Resistance, 70°C Max

Installation

  		 or   	
Interior: porous and dry surface		Heavy profiles Exterior: non-porous or humid surface	
 <p>Sealing to wall/ceiling</p>	 <p>DecoFix Pro Strong, water-based acrylic installation adhesive</p>	 <p>DecoFix Power Very strong MS-Polymer-based installation adhesive</p>	
 <p>Joints between mouldings</p>	 <p>DecoFix Extra Polyurethane-based adhesive</p>		
<p>DecoFix Pro Surface treatment</p> 	<p>DecoFix Power Surface treatment</p> 	<p>DecoFix Extra Surface treatment</p> 	

Storage and Installation Conditions



- Store profiles and adhesives at room temperature
- Wait 24 hours before installing to ensure correct temperature

Gallery

