

ARC HIGH DENSITY PU WALL COVING PUROTOUCH®

| SKU: TAGC373-2M




ULTRA LEDs

ultraleds.co.uk

0800 088 3300

orders@ultraleds.co.uk

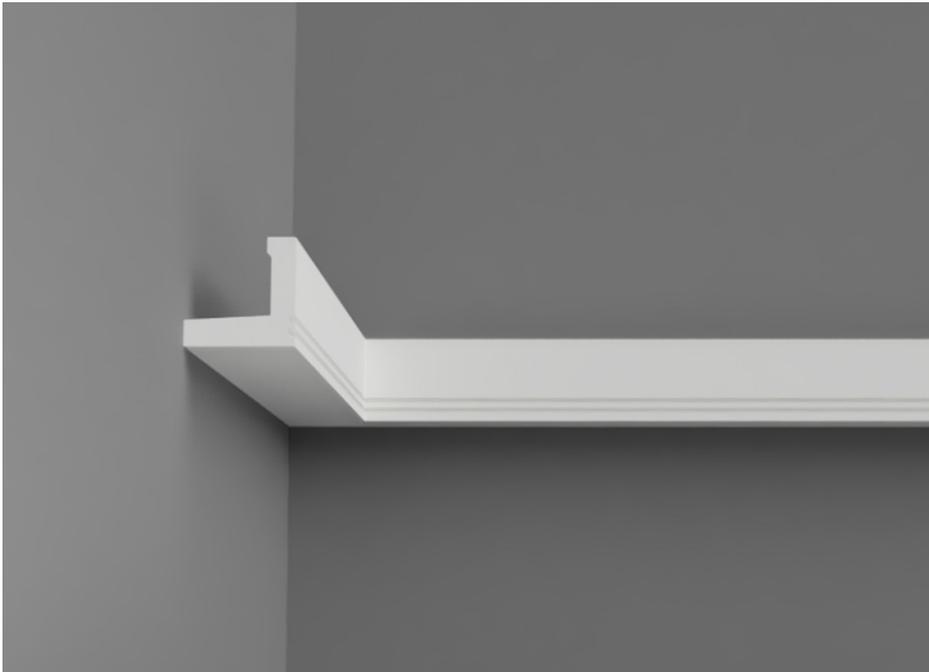



TECHNICAL INFORMATION

Technical Info

Composition	PU - Polyurethane
Hardness	> 30 shore D
Density	± 215 kg/m ³
Thickness	8mm > 30mm
Fire Standard	E
Environment	CFC free
Toxic	Free of asbestos, cyanides and formaldehyde
Water Absorption	< 0.1%
Heat Conductivity	$\lambda = 0.029 \text{ W/mK}$

Dimensions

LED Profile (CHAN-178)

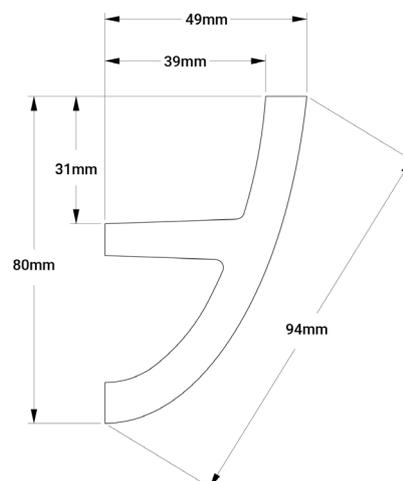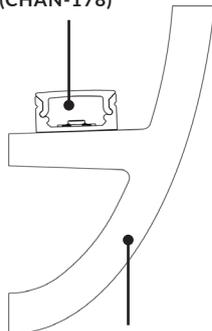

FEATURES & BENEFITS

- A highly defined sculpting process results in high definition shaping and detailing
- Pre primed and ready for painting
- Easy to finish with high quality paints
- Easy to cut, sand and mitre to requirements
- Suitable for outdoor use when treated correctly
- Abrasion resistance, great for installations at floor level
- Resistant to common solvents and light moisture as standard
- High Heat Resistance, 70°C Max

Installation

 <p>Interior: porous and dry surface</p>		 <p>Heavy profiles or Exterior: non-porous or humid surface</p>
 <p>Sealing to wall/ceiling</p>	 <p>DecoFix Pro Strong, water-based acrylic installation adhesive</p>	 <p>DecoFix Power Very strong MS-Polymer-based installation adhesive</p>
 <p>Joints between mouldings</p>		
<p>DecoFix Pro Surface treatment  DecoFix Power Surface treatment  DecoFix Extra Surface treatment </p>		

Storage and Installation Conditions



- Store profiles and adhesives at room temperature
- Wait 24 hours before installing to ensure correct temperature

Gallery

