

# LARGE ARC HIGH DENSITY PU WALL COVING PUROTOUCH®

| SKU: TAGC374




ULTRA LEDES

[ultraleds.co.uk](http://ultraleds.co.uk)

0800 088 3300

[orders@ultraleds.co.uk](mailto:orders@ultraleds.co.uk)

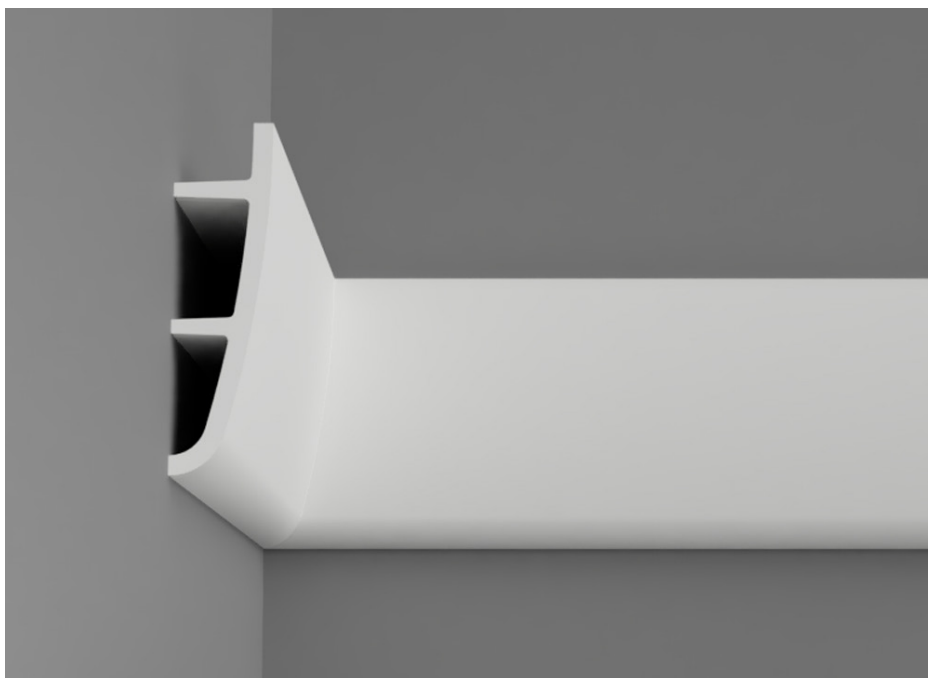


## TECHNICAL INFORMATION

### Technical Info

Composition	PU - Polyurethane
Hardness	> 30 shore D
Density	± 215 kg/m <sup>3</sup>
Thickness	8mm > 30mm
Fire Standard	E
Environment	CFC free
Toxic	Free of asbestos, cyanides and formaldehyde
Water Absorption	< 0.1%
Heat Conductivity	$\lambda = 0.029 \text{ W/mK}$



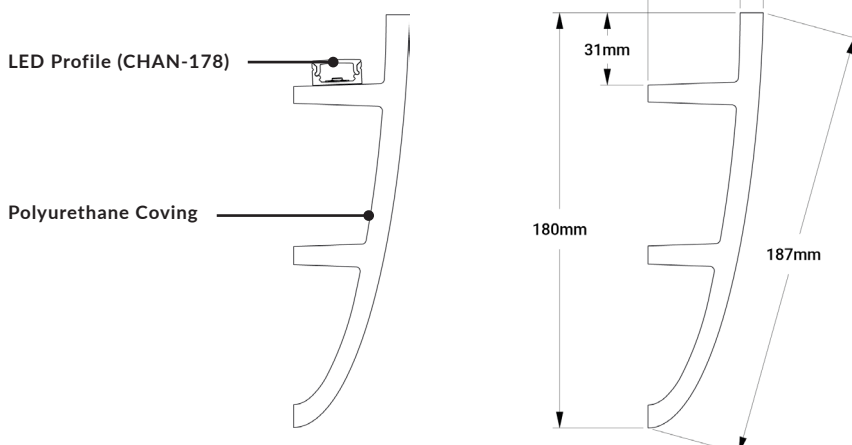






### Dimensions



## FEATURES & BENEFITS

- A highly defined sculpting process results in high definition shaping and detailing
- Pre primed and ready for painting
- Easy to finish with high quality paints
- Easy to cut, sand and mitre to requirements
- Suitable for outdoor use when treated correctly
- Abrasion resistance, great for installations at floor level
- Resistant to common solvents and light moisture as standard
- High Heat Resistance, 70°C Max

## Installation

 <p>Interior: porous and dry surface</p>		 <p>Heavy profiles or Exterior: non-porous or humid surface</p>
 <p>Sealing to wall/ceiling</p>	 <p><b>DecoFix Pro</b> Strong, water-based acrylic installation adhesive</p>	 <p><b>DecoFix Power</b> Very strong MS-Polymer-based installation adhesive</p>
 <p>Joints between mouldings</p>		
<p><b>DecoFix Pro</b> Surface treatment  <b>DecoFix Power</b> Surface treatment  <b>DecoFix Extra</b> Surface treatment </p>		

## Storage and Installation Conditions



- Store profiles and adhesives at room temperature
- Wait 24 hours before installing to ensure correct temperature

## Gallery

