

24V BRIGHT PLUS LED TAPE, COOL WHITE 6000K, 120 LEDS P/M, IP20 (5M REEL)

| SKU: TL016CW120




ULTRA LEDs

 ultraleds.co.uk

 0800 088 3300

 orders@ultraleds.co.uk

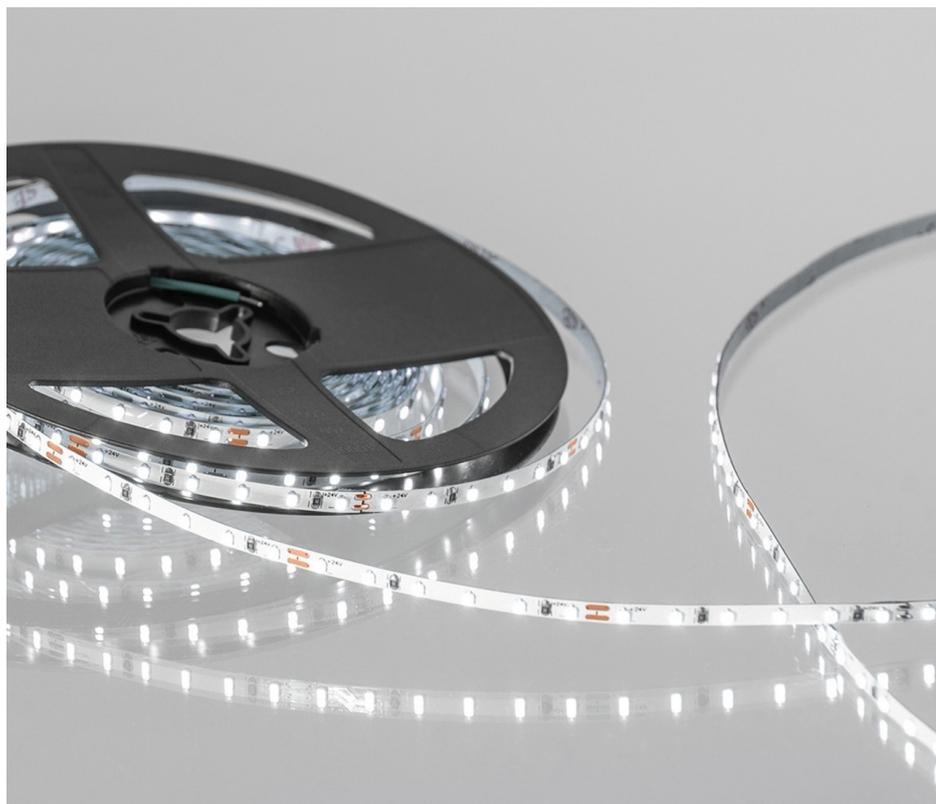

FEATURES & BENEFITS

- Slimline LED tape at just 4mm wide. Great when paired with our micro aluminium profile
- High quality, high brightness
- Low light degradation with the 2216 LED Chip
- 95 CRI achieved with an incredible 4mm width
- Need a custom length?
We can cut our tapes to your exact specification

IP20

6000
K

24V

CE
EMC

CE
LVD

RoHs

3YR
Guarantee

TECHNICAL INFORMATION

Tape Specifications

SKU Code	TL016CW120
Voltage	24V
Watts p/M	9W p/M
No. of LEDs p/M	120 LEDs
Colour	Cool White
Colour Temperature	6000K
IP Rating	IP20
Lumens p/M	810LM
Lumens p/W	90LM
LED Chip Type	2216
LED Chip Size	2.2mm x 1.6mm
Beam Angle	120°
CRI	>95
PCB Width	4mm
PCB Thickness	1.2mm
Cut Points	Every 5cm
Operating Temp	-40°C to +40°C
Average Lifespan	Upto 25000 Hours
Certification	CE-EMC CE-LVD RoHs
Guarantee	3 Years

Driver Requirements

1 Metre	> 9.9W
2 Metres	> 19.8W
3 Metres	> 29.7W
4 Metres	> 39.6W
5 Metres	> 49.5W

DESCRIPTION

New slimline LED tape at just 4mm wide. Great for all the tight installation areas and ideal for use with our smallest Micro Aluminium Profile or edge lighting acrylic.

Available in colour temperatures ranging from 2000k to 6000k and with a 95 CRI rating for the most accurate colour rendering.


Dimmable via DALI, DMX, ELV, TRIAC and 0-10V methods.

What Driver do I need?

To work out what driver you will need for each length of LED you can simply multiply the wattage of the tape by the length of LED strip you will be using, this will give you the total wattage the LED strip requires, then simply choose a driver which is at least 10% above this figure.

How do I connect?

LED strip lights are supplied with 15cm of live wires pre-soldered on one end. If you are using one of our Standard Range Drivers you can order 1 x U2.1FEM to connect with. If you are using one of our Premium Range Drivers you can wire in directly via terminals located on the unit. (With exception to our waterproof premium drivers, which are fully sealed).

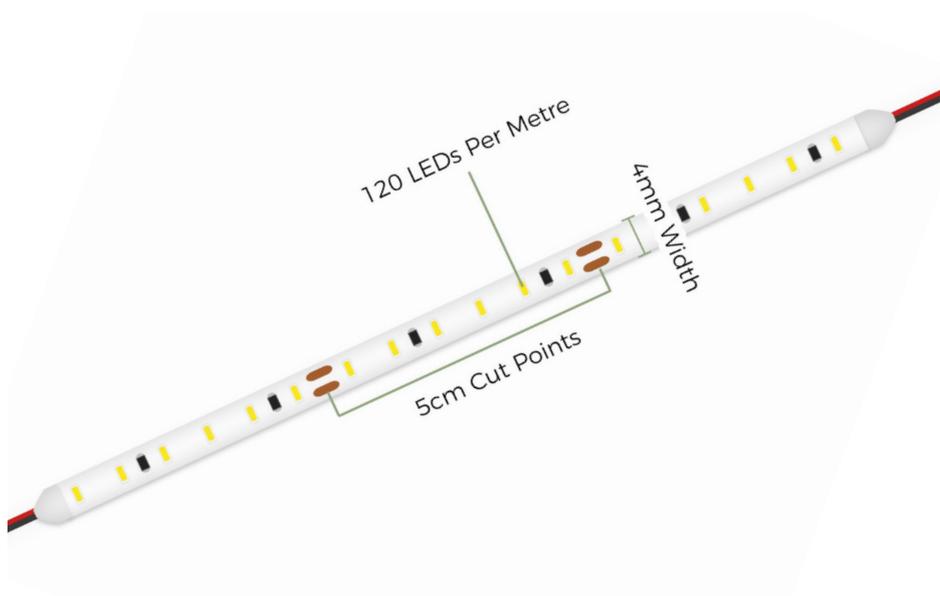

TAPE DIAGRAM