

Toning Professional Tuneable
- 24V - 140 LEDs p/m - IP65 - 5m Reel



SKU: TP24-276K-140-5M-90-IP



5M	24V	140 LEDs/m	IP65	2700K ~ 6000K
-----------	------------	----------------------	-------------	-----------------------------------

Professional Tuneable 2700K-6000K


140 LEDs per metre

5 Metre Reel

100mm Cut Points

5 Year Warranty

Dimensions

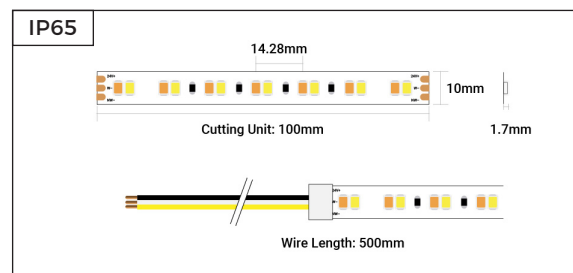

Electrical Data

SKU	Voltage	Current Consumption			Power Consumption		
		Max.	Typ.	5m	Max.	Typ.	5m
TP24-276K-140-5M-90-IP	24V	0.8A/m	0.713A/m	3.2A	19.2W/m	17.1W/m	76.8W

Photometric & Light Data

SKU	Colour Temp	Dimmable	SDCM	Beam Angle
TP24-276K-140-5M-90-IP	2700K-6000K	Yes	-	120°

Colour	CCT / Wavelength	Lumens / m	Lumens / W	CRI
2700K-6000K	2700K - 6000K	1575	105	>90
2700K	2700K	750	100	>90
6000K	6000K	825	110	>90

Mechanical Data

SKU	IP Rating	Cut Points	Cable Length	Cable End	LEDs / m
TP24-276K-140-5M-90-IP	IP65	100mm	500mm	Dual End	140 LEDs

SKU	Adhesive Type	Bend Diameter	Operating Temp	Warranty
TP24-276K-140-5M-90-IP	3M	Ø 60mm	-25°C ~ +40°C	5 Years

SKU	Length	Width	Height
TP24-276K-140-5M-90-IP	5000mm	10mm	1.7mm